



Chengdu Sanlianweixun Technology Co., Ltd.


X band High Altitude Waveguide Bandpass Filter

【Product introduction】:

Features: High altitude, high power, sealed, without tuning screws.

【Technical indicators】:

1. Working frequency: 9.55~10.30GHz
2. VSWR: 1.20:1 MAX
3. Insertion loss: 0.5dB MAX
4. Rejection: 30dB MIN@9.38GHz
5. Power Capacity: 200W(average power)
6. Air tight requirements: inflate 0.12Mpa. reduce less than 0.01Mpa after 1hour.
7. Structure:

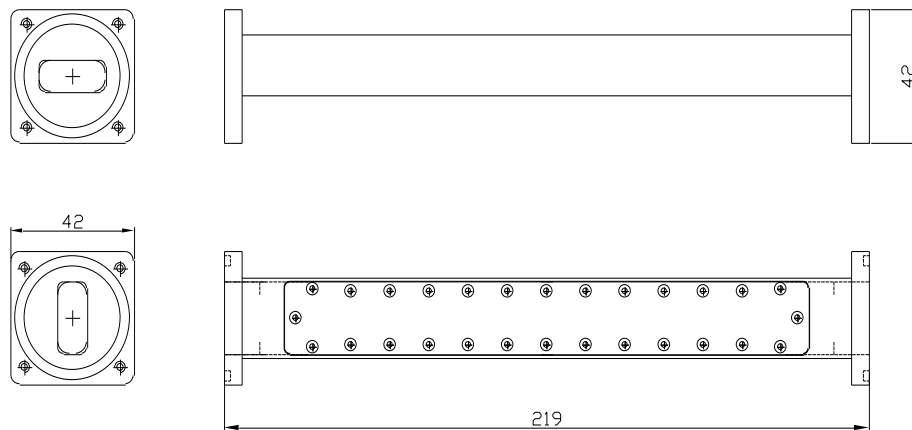

X Band High Altitude Waveguide Bandpass Filter



X Band High Altitude Waveguide Bandpass Filter

Address: No. 18, Chengzhi Road. Chenghua District. Chengdu City. China. 610053

Tel: +86-021-86780908

Email: jamesruiwang@163.com