



Chengdu Sanlianweixun Technology Co., Ltd.


Ku Band Waveguide Rotary Joint II

【Product introduction】:


Features: low insertion loss, stable structure.

【Technical indicators】:

1. Working frequency: 10.7~14.5GHz
2. VSWR: 1.15:1 MAX
3. Insertion loss: 0.2dB MAX
4. Operating temperature: -55°C~+85°C
5. Interface: circular waveguide Φ 19.05
6. Structure:

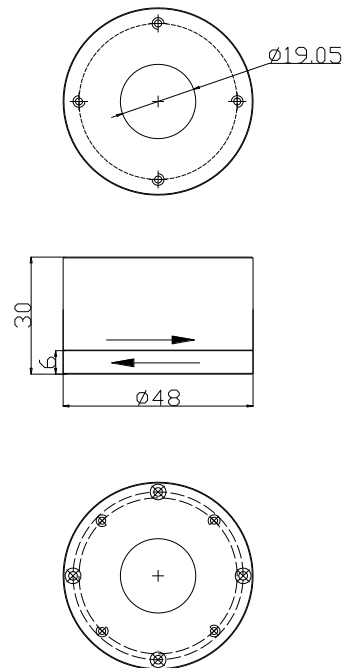

Ku Band Waveguide Rotary Joint II

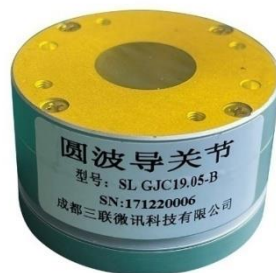

Ku Band Waveguide Rotary Joint II

Address: No. 18, Chengzhi Road. Chenghua District. Chengdu City. China. 610053
Tel: +86-021-86780908 Email: jamesruiwang@163.com