



Chengdu Sanlianweixun Technology Co., Ltd.


K Band Bandpass Filter

【Product introduction】:


Features: low insertion loss, great rejection without tuning screws.

【Technical indicators】:

1. Working frequency: 17.7~22.2GHz
2. VSWR: 1.20:1 MAX
3. Insertion loss: 0.2dB MIN
4. Rejection: 80dB MIN@ 27.5~31.5GHz
5. Interface: WR42
6. Structure:

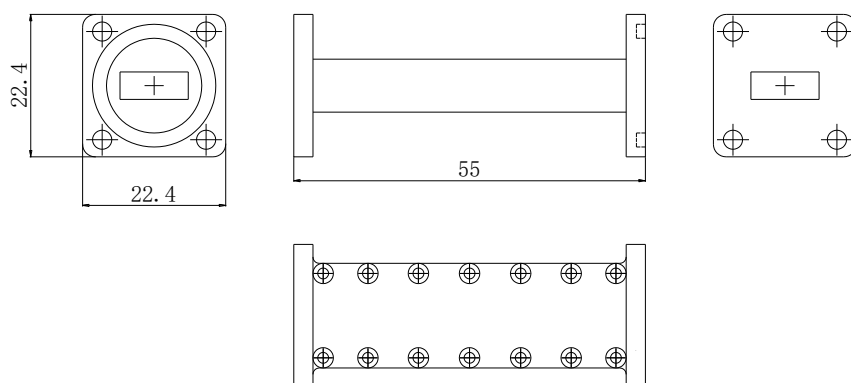

K Band Bandpass Filter

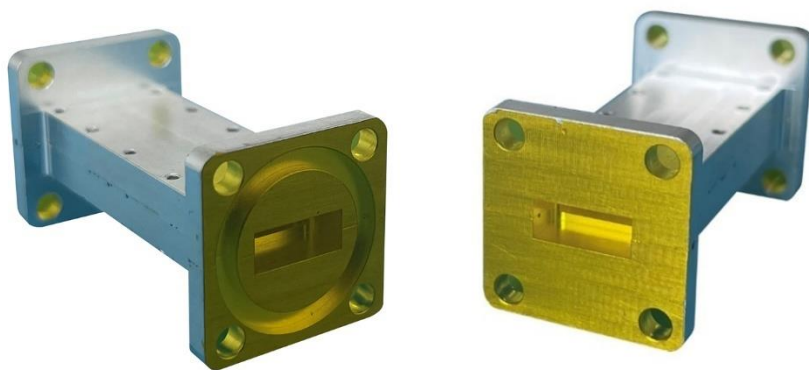

K Band Bandpass Filter

Address: No. 18, Chengzhi Road. Chenghua District. Chengdu City. China. 610053
Tel: +86-021-86780908 Email: jamesruiwang@163.com